

Tools needed for **Load cell** service




- Flat screwdriver - various
- Hex key 2.5 x 110mm

## Load cell service

1

Remove screws from load cell with  
Hex key 2.5

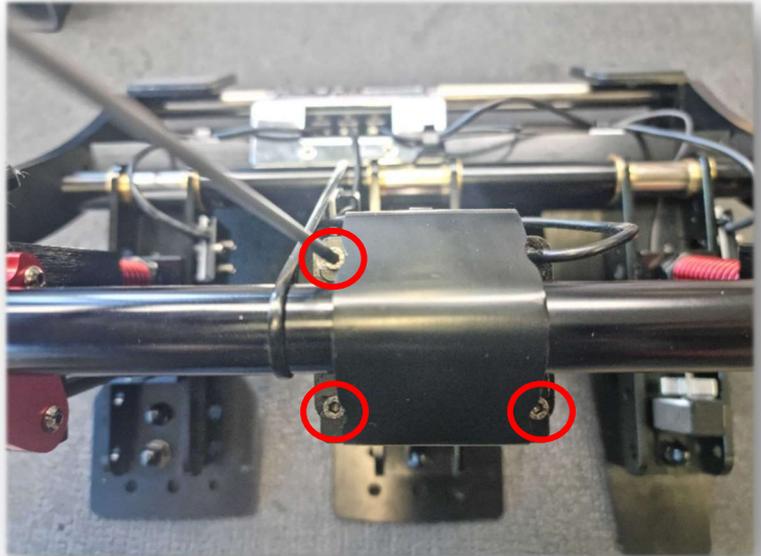

2


Push the load cell from left side to the right and pull it out

**Tip:** You can help yourself with  
**Screwdriver** if it is hard to push it with  
fingers



3

Unplug load cell from pcba

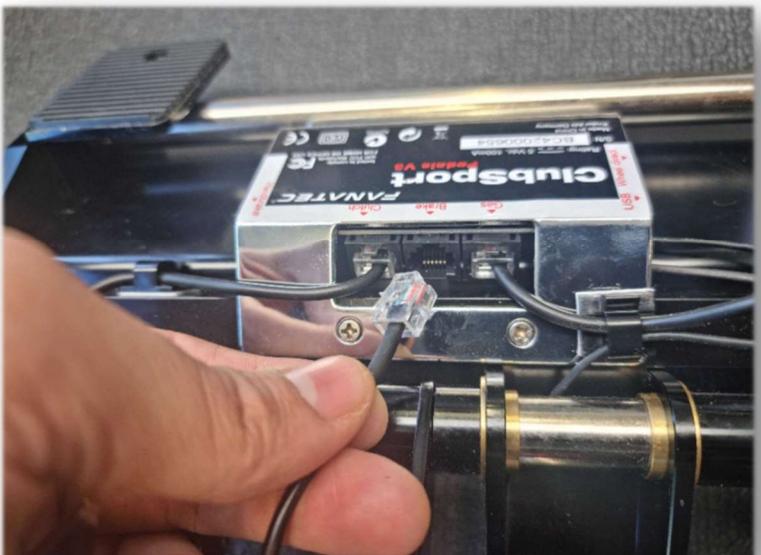

4

Push the pedal bar down with  
**Screwdriver**

 **CAUTION**

Be careful not to scratch pedals!



5

When holding pedal bar with  
**Screwdriver**, push the loadcell from  
the other side back to its place




6

Pull the cable true cable holders



7

Connect load cell into the brake port

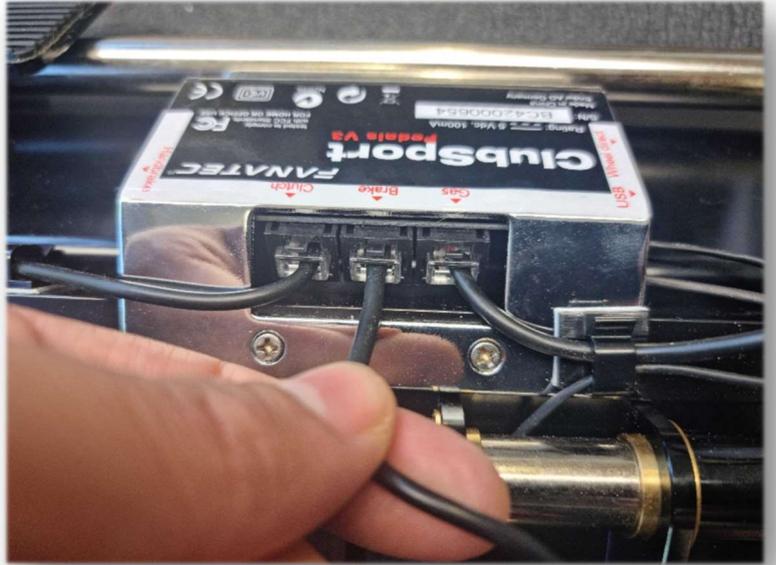

8

Turn back 3 screws with Hex key 2.5

**TEST THE PEDALS!**

